

EUCHNER | MBM

X4 DC24V

X2 PN2

X3 DC24V

X1 PN1



MGB2 Modular

The new MGB2 represents the consequent further development of the globally successful Multifunctional Gate Box MGB. A revised design, new and expanded functions, as well as a modular layout offer maximum flexibility. The MGB2 is more than just pure safeguarding. It makes it possible to integrate into one device all the relevant functions related to the safety guard.

Simple connection concept

In the *Modular* version the MGB2 is equipped with a bus module (MBM) with PROFINET/PROFISAFE integrated. This module can either be connected directly to the MGB2 or, if space is tight, it can be mounted remotely. If the bus module is mounted remotely, it is even possible to connect several MGB2 *Modular* to one MBM.




Flexible integration of a large number of functions

Thanks to the modular design, the MGB2 Modular can be variably equipped with different functions. The MGB2 Modular offers space for two submodules, each with up to three different controls. It is possible to replace a submodule at any time, even during operation, as the new MGB2 Modular is hot-pluggable.

Variable in use and easy to mount

The MGB2 *Modular* can be fitted to doors hinged on the right and left, as well as to sliding doors. An integrated alignment aid shows at a glance whether the MGB2 *Modular* has been mounted correctly.



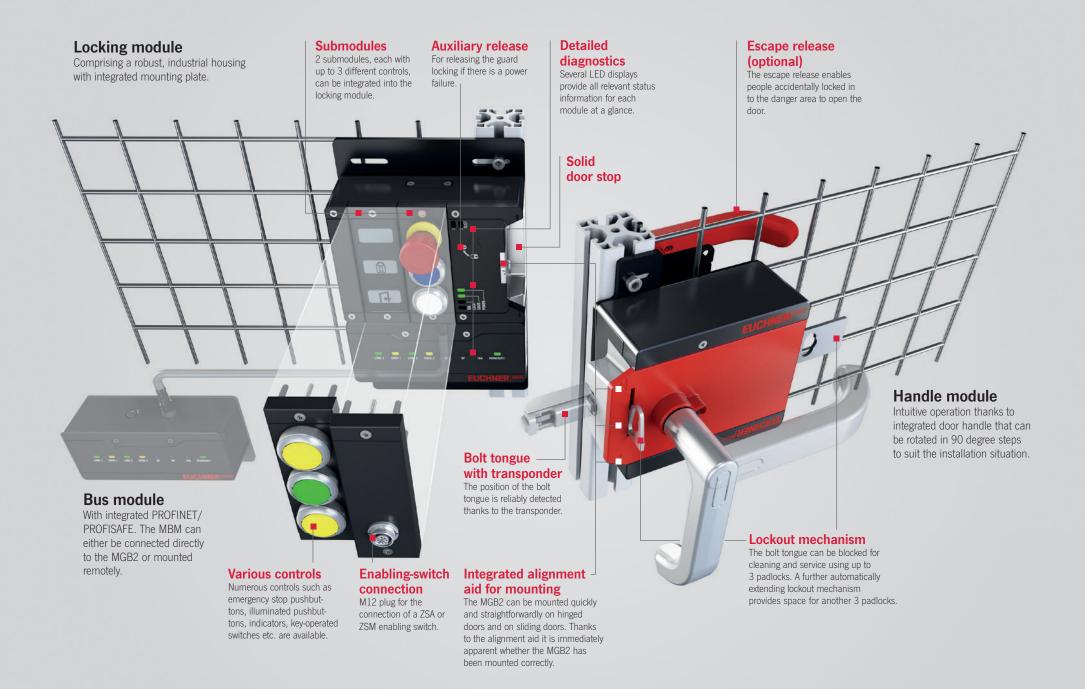

Advantages of the MGB2 *Modular* at a glance:

- Modular design with submodules
- Several MGB2 can be connected to one bus module MBM
- ► Robust, industrial housing
- Easy mounting thanks to integrated mounting plates
- ► Category 4 / PL e for all safety functions acc. to EN ISO 13849-1
- Easy to service thanks to hot-plugging function
- ► High coding level acc. to EN ISO 14119
- Escape release can be retrofitted at any time
- Door handle with integrated door stop
- ► Integrated lockout mechanism
- ► Locking force 2000 N
- ► Degree of protection IP65
- For usage on hinged and sliding doors
- Comprehensive diagnostic functions directly on each module and in the control system



EUCHNER GmbH + Co. KGKohlhammerstraße 16
70771 Leinfelden-Echterdingen
Germany

Tel. +49 711 7597-0 Fax +49 711 753316 info@euchner.de www.euchner.com

