



»Exploit all the advantages
– with well thought-out
original accessories from
EUCHNER.«

- ▶ Connection material – connect safely and easily, no long search for cables and plug connectors.
- ▶ Fixing material – safe and easy installation for many fastening situations.
- ▶ Deflection mirrors and mounting pillars – enlargement of the protective field and protection of the device
- ▶ Laser alignment aid and test rods – straightforward setup and testing of the protective function.

Accessories

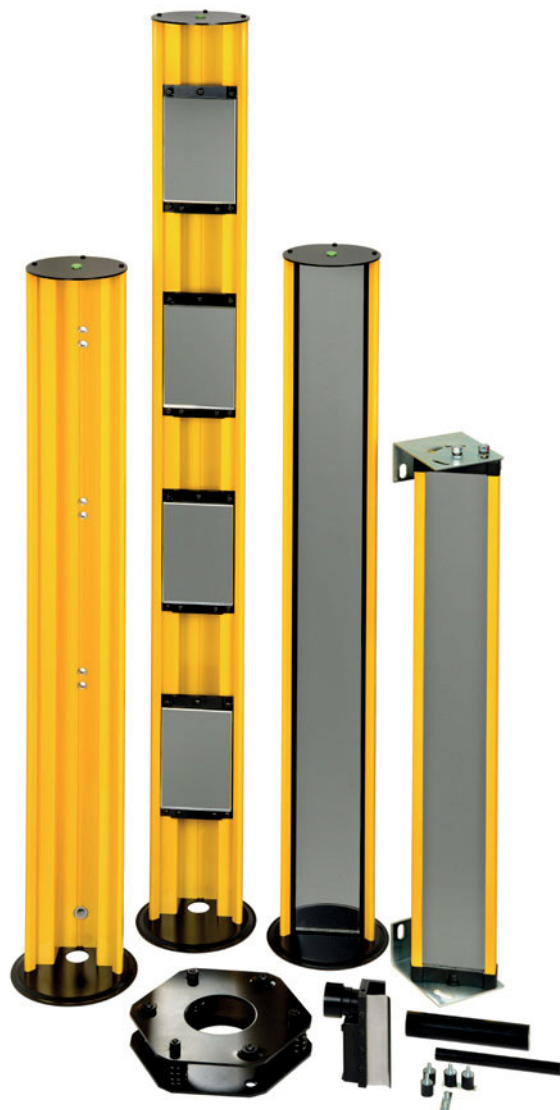


Accessories


Connection material

M12	8 pin	5 pin	PVC	PUR
-----	-------	-------	-----	-----

Connection cables with plug connectors


Version		Order No./item	
M12 5 pin PVC	Connection cable with female plug, flying lead, 5 x 0.34 mm²	5m 100183 C-M12F05-05X034PV05,0-MA-100183	For detailed information, enter the order number for the product in the search box at www.euchner.com .
		10m 100184 C-M12F05-05X034PV10,0-MA-100184	
		20m 100185 C-M12F05-05X034PV20,0-MA-100185	
	Extension, plug connectors at both ends for connection to decentralized peripheral equipment	5m 100180 C-M12F05-05X034PV05,0-M12M05-100180	
		10m 100181 C-M12F05-05X034PV10,0-M12M05-100181	
		20m 100182 C-M12F05-05X034PV20,0-M12M05-100182	
M12 5 pin PUR	Connection cable with female plug, flying lead, 5 x 0.34 mm²	5m 113620 C-M12F05-05X034PU05,0-MA-113620	
		10m 113640 C-M12F05-05X034PU10,0-MA-113640	
		20m 113682 C-M12F05-05X034PU20,0-MA-113682	
	Extension, plug connectors at both ends for connection to decentralized peripheral equipment	30m 122784 C-M12F05-05X034PU30,0-MA-113682	
		5m 119932 C-M12F05-05X034PU05,0-M12M05-119932	
		10m 119947 C-M12F05-05X034PU10,0-M12M05-119947	
M12 8 pin PVC	Connection cable with female plug, flying lead, 8 x 0.25 mm²	20m 119971 C-M12F05-05X034PU20,0-M12M05-119971	
		5m 100177 C-M12F08-08X025PV05,0-MA-100177	
		10m 100178 C-M12F08-08X025PV10,0-MA-100178	
		20m 100179 C-M12F08-08X025PV20,0-MA-100179	
	30m 115116 C-M12F08-08X025PV30,0-MA-115116		
	M12 8 pin PUR	Connection cable with female plug, flying lead, 8 x 0.25 mm²	5m 115112 C-M12F08-08X025PU05,0-MA-115112
10m 115113 C-M12F08-08X025PU10,0-MA-115113			
20m 115114 C-M12F08-08X025PU20,0-MA-115114			
30m 115257 C-M12F08-08X025PU30,0-MA-115257			

Screened connection cables with plug connector

Version		Order No./item	
<div style="display: flex; flex-direction: column; align-items: center;"> <div style="border: 1px solid black; border-radius: 5px; padding: 2px 5px; margin-bottom: 2px;">M12</div> <div style="border: 1px solid black; border-radius: 5px; padding: 2px 5px; margin-bottom: 2px;">8 pin</div> <div style="border: 1px solid black; border-radius: 5px; padding: 2px 5px;">PVC</div> </div> <p style="text-align: center;">Connection cable with female plug, screened ¹⁾, 8 x 0.25 mm²</p>	5m	<p style="text-align: center;">077751</p> <p>C-M12F08-08X025PV05,0-MW-077751</p>	For detailed information, enter the order number for the product in the search box at www.euchner.com .
	10m	<p style="text-align: center;">077752</p> <p>C-M12F08-08X025PV10,0-MW-077752</p>	
	15m	<p style="text-align: center;">077753</p> <p>C-M12F08-08X025PV15,0-MW-077753</p>	
	20m	<p style="text-align: center;">077871</p> <p>C-M12F08-08X025PV20,0-MW-077871</p>	
	25m	<p style="text-align: center;">077872</p> <p>C-M12F08-08X025PV25,0-MW-077872</p>	
	50m	<p style="text-align: center;">077873</p> <p>C-M12F08-08X025PV50,0-MW-077873</p>	


1) The screen on the connection cable is connected to the plug housing.

Connection cables for cascading (master/slave 1/slave 2)


Version		Order No./item	
<div style="display: flex; flex-direction: column; align-items: center;"> <div style="border: 1px solid black; border-radius: 5px; padding: 2px 5px; margin-bottom: 2px;">M12</div> <div style="border: 1px solid black; border-radius: 5px; padding: 2px 5px; margin-bottom: 2px;">5 pin</div> <div style="border: 1px solid black; border-radius: 5px; padding: 2px 5px;">PVC</div> </div> <p style="text-align: center;">Connection cable M12, straight, 5-pin, female-female</p>	0,3m	<p style="text-align: center;">156926</p> <p>C-M12F05-05X034PV0,30-M12F05</p>	For detailed information, enter the order number for the product in the search box at www.euchner.com .
	3m	<p style="text-align: center;">156927</p> <p>C-M12F05-05X034PV03,0-M12F05</p>	
	5m	<p style="text-align: center;">156928</p> <p>C-M12F05-05X034PV05,0-M12F05</p>	
	10m	<p style="text-align: center;">156929</p> <p>C-M12F05-05X034PV10,0-M12F05</p>	
	25m	<p style="text-align: center;">156930</p> <p>C-M12F05-05X034PV25,0-M12F05</p>	

Mounting accessories

Mounting pillars


Designation	Version/usage	Order No./item	
Socket for mounting pillars	Spring-mounted, height 55 mm	156884 AM-OS-P-AA	For detailed information, enter the order number for the product in the search box at www.euchner.com .
	Height 34 mm	156885 AM-OS-P-AB	
Mounting pillar	For protective field heights from 160 - 610 mm or for 2 beam light grids	156886 AM-OS-C-A1-1000	
	For protective field heights from 760 - 1060 mm or 3 - 4 beam light grids	156887 AM-OS-C-A1-1200	
	For protective field heights from 1210 to 1360 mm	156888 AM-OS-C-A1-1670	
	For protective field heights from 1510 to 1660 mm	156889 AM-OS-C-A1-1970	
Mounting pillar with cable gland PG11	For protective field heights from 160 - 610 mm or for 2 beam light grids	156890 AM-OS-C-A1-M-1000	
	For protective field heights from 760 - 1060 mm or for 3 - 4 beam light grids	156891 AM-OS-C-A1-M-1200	
	For protective field heights from 1210 to 1360 mm	156892 AM-OS-C-A1-M-1670	
	For protective field heights from 1510 to 1660 mm	156893 AM-OS-C-A1-M-1970	
4 x vibration damper	For protective field height 160 mm	156916 AM-OS-D-V04	
8 x vibration damper	For protective field heights from 310 - 1060 mm	156917 AM-OS-D-V08	
12 x vibration damper	Protective field heights 1210 - 1810 mm or 2 - 4 beam light grids	156918 AM-OS-D-V12	
4 x adjustable holder	For protective field heights up to 1210 mm	156919 AM-OS-B-A1-V04	
6 x adjustable holder	For protective field heights from 1210 mm	156920 AM-OS-B-A1-V06	
4 x adjustable holder (180°)	Can be rotated by 180°	156921 AM-OS-B-A2-V04	

Function expansions

Designation	Version/usage	Order No./item		
Mounting pillar with deflection mirror	For protective field heights from 160 - 610 mm or for 2 beam light grids	156894 AE-OS-SC-1000	For detailed information, enter the order number for the product in the search box at www.euchner.com .	
	For protective field heights from 760 - 910 mm or for 3 beam light grids	156895 AE-OS-SC-1200		
	For protective field heights from 760 - 910 mm or for 4 beam light grids	156896 AE-OS-SC-1330		
	For protective field heights from 1060 to 1360 mm	156897 AE-OS-SC-1670		
	For protective field heights from 1510 to 1660 mm	156898 AE-OS-SC-1970		
Mounting pillar with 2 deflection mirrors	For light grid heights with 2 beams	156899 AE-OS-SC-2B		
Mounting pillar with 3 deflection mirrors	For light grid heights with 3 beams	156900 AE-OS-SC-3B		
Mounting pillar with 4 deflection mirrors	For light grid heights with 4 beams	156901 AE-OS-SC-4B		
Deflection mirror	For protective field height 160 mm	156902 AE-OS-S-160		
	For protective field height 230 mm	156903 AE-OS-S-230		
	For protective field height 310 mm	156904 AE-OS-S-310		
	For protective field height 460 mm	156905 AE-OS-S-460		
	For protective field height 610 mm or for 2 beam light grids	156906 AE-OS-S-610		
	For protective field height 760 mm	156907 AE-OS-S-760		
	For protective field height 910 mm or for 3 beam light grids	156908 AE-OS-S-910		
	For protective field height 1060 mm or for 4 beam light grids	156909 AE-OS-S-1060		
	For protective field height 1210 mm	156910 AE-OS-S-1210		
	For protective field height 1360 mm	156911 AE-OS-S-1360		
	For protective field height 1510 mm	156912 AE-OS-S-1510		
	For protective field height 1660 mm	156913 AE-OS-S-1660		
For protective field height 1810 mm	156914 AE-OS-S-1810			

LCA

Miscellaneous accessories

Designation	Version/usage	Order No./item	
Laser alignment aid	For light curtains/light grids LCA	156915 AY-OS-LSR	For detailed information, enter the order number for the product in the search box at www.euchner.com .
Test rod Ø 14 mm	For light curtains with resolution 14 mm	156922 AY-OS-FTR-14	
Test rod Ø 30 mm	For light curtains with resolution 30 mm	156923 AY-OS-FTR-30	
Test rod Ø 40 mm	For light curtains with resolution 40 mm	156924 AY-OS-FTR-40	
Test rod Ø 50 mm	For light curtains with resolution 50 mm	156925 AY-OS-FTR-50	